



MILLER
by Honeywell

Fall Protection

Remove Watermark Now

Anywhere throughout the workplace where there is potential for falling, employers are required to assess all conditions and engineer safety solutions. The addition of fall protection devices may also be required in such work areas.

Visit www.osha.gov for complete details and regulation requirements.

STOP THE DROP

FALL PROTECTION FOR TOOLS®

capital SAFETY

DBI-SALA PYTHON SAFETY

Fall Protection for Tools

From a world leading supplier of fall protection for people! Struck-by falling objects is a leading cause of injury for workers and the 3rd highest cause of death in the workplace. The DBI-SALA range of Python Safety products has been developed to prevent dropped tools and equipment. Fall Protection for Tools make work environments safer and more productive by drastically reducing incidents resulting in personal injury equipment damage and tool loss.





Remove Watermark Now



Safe Bucket

Designed to be used at height with a built-in closure system that helps prevent dropped objects. Includes multiple connection points that can be tethered to. Vinyl bucket is load rated for 250 lbs. Hook-and-loop closure system helps prevent accidental drops. Indicator tabs show when bucket is in lockdown mode or easy access mode. Hard composite plating sewn into bottom protects bucket from accidental punctures. Protective leather sleeve covers inserts and is resilient to the elements and harsh work environments. Includes heavy-duty hoisting/shoulder strap and high-quality, lightweight aluminum twist-lock carabiner load rated for 6,700 lbs. Size: 15" x 12 1/2" dia.



1500140

ITEM #	ORDER #	DESCRIPTION	UOM
1500140	458056401	Standard safe bucket	Ea



Tool Holsters

- Scaffold Wrench Holster with Retractor: Quickly holster scaffold wrenches while working at height. Features Beacon™ Hi-Vis Reflectors.
- Drill Battery Holster/Sleeve: Unique sleeve design conforms to the size of virtually any drill battery. Sleeve is cinched to the drill, allowing the drill to be tethered off while being used at height. 10-lb. load rating.

ITEM #	ORDER #	DESCRIPTION	UOM
1500096	458055961	Scaffold wrench holster w/ retractor	Ea
1500090	458055901	Drill battery holster/sleeve	Ea



Single Tool Holster

Equipped with D-rings that are load rated for 5 lbs. Beacon™ Hi-Vis Reflectors are easy to identify and locate, even when left in dark spaces. Highly reflective material is stitched into the front and back of the holster allowing it to be detected in low light conditions with a flashlight. Quick-Mag™ magnetic tool staging system speeds up workflow and reduces how often tools need to be holstered. Allows tools to simply stick to the holster ensuring that tools are always at the ready. Drain vent helps keep the holster dry by allowing water to pass through, protecting tools from rusting and protecting holster from dry rot. Retractor is load rated for 1.5 lbs.



1500104

ITEM #	ORDER #	DESCRIPTION	UOM
1500104	458056041	Single tool harness holster w/ retractor	Ea



Hook2Loop Bungee Tether

Built to be more durable and last longer than competitor products. Third-party load rated and designed to prevent dropped objects. Hook features self-locking carabiner that requires double action to open, then automatically locks and closes to prevent accidental opens. 10-lb. Load rating.

ITEM #	ORDER #	DESCRIPTION	UOM
◆ 1500047	458055471	32"-47" Hook2Loop bungee tether	Ea



Small Parts Pouch

Innovative self-closure system traps objects inside the pouch, making it nearly impossible for objects to fall out once placed in the bag. Easy to retrieve objects since no opening or closing is necessary. Compatible with most tool belts. Black canvas.



1500119

ITEM #	ORDER #	DESCRIPTION	UOM
1500119	458056191	Small parts pouch	Ea

1500096



1500090

Tools not included



Coil Tethers

Alternative to classic Bungee Tethers. Built with lightweight vinyl that's easy to clean, coil tethers naturally stay out of the way thanks to their ultra-compact design.

- **Hook2Hook Coil Tether:** Relaxed length 5"; stretched length 62"; stays out of the way when not in use; 5-lb. load rating.
- **Hard Hat Tether:** Compact coil design keeps lanyard out of the way of user; easy to clean; 2-lb. load rating.



1500063



1500061

ITEM #	ORDER #	DESCRIPTION	UOM
◆ 1500063	458055631	5"-62" Hook2Hook coil tether	Ea
◆ 1500061	45805561	4"-34" Hard hat tether	10/Pk



1500047



Remove Watermark Now


SALA PYTHON SAFETY Heavy-Duty Quick Wrap Tape



Conforms to the shape of whatever it is applied to. Used with Python Safety D-Rings and Tool Cinch Attachments to create instant tethering points on virtually any tool. Made from a self-fusing silicone rubber that leaves no adhesive or residue behind. Inner fiberglass webbing increases strength and makes tape resistant to sharp objects. 1" x 108".

1500044

ITEM #	ORDER #	DESCRIPTION	UOM
◆ 1500044	458055441	Yellow tape	Ea
◆ 1500035	458055351	Blue tape	Ea

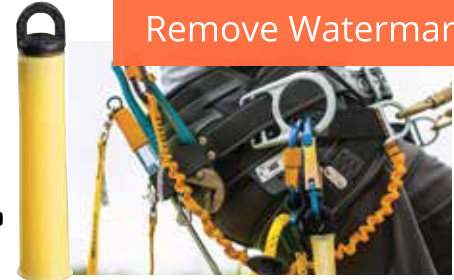

1500029

SALA PYTHON SAFETY Quick Spins

Simply slides onto the handle of a tool in seconds. Swivel spin top makes Quick Spins tangle-resistant. Reusable and suitable for non-conductive use. Size: 1" dia.; 1-lb. load rating.

ITEM #	ORDER #	DESCRIPTION	UOM
1500029	45805529	Quick Spins	10/Pk

SALA PYTHON SAFETY D-Ring

Can be attached to virtually any tool under 2 lbs. using Python® Safety Quick Wrap Tape. Creates an instant attachment point in less than a minute.



1500003

ITEM #	ORDER #	DESCRIPTION	UOM
◆ 1500003	45805503	1/2" x 2 1/4" D-rings	10/Pk

SALA PYTHON SAFETY Tool Cinch Attachment

Features a cinch design that allows user to quickly secure equipment up to 35 lbs. Stabilization Wings can be used to keep Tool Cinch Attachment in place using Python® Safety Quick Wrap Tape. For use on pinch bars, sledge hammers, slugging wrenches, and clamps.



1500015

ITEM #	ORDER #	DESCRIPTION	UOM
◆ 1500015	458055151	Tool Cinch Attachment w/ 2 Stabilization Wings	Ea



1191209

PROTECTA PRO™ Construction Style Harnesses

Designed with integrated comfort padding on shoulders and hips. Includes polyester webbing for superior abrasion resistance and durability, lightweight hardware and connecting components, built-in impact indicators for easy inspection, integral lanyard keeper, tongue-buckle body belt with hip pads, and back and side D-rings for positioning. Features tongue-buckle leg straps for fast and easy donning, spring-loaded torso buckles for quick and easy adjustment, and belt loops. Capacity: 420 lbs. Meets or exceeds all applicable OSHA regulations and ANSI standards, including ANSI Z359.11.

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
1191209	458035051	Construction style harness	M/L	Ea
1191210	458035061	Construction style harness	XL	Ea

1191209, BACK

PROTECTA FIRST™ Vest Style Harnesses

Features 5-point adjustment, back D-rings and pass-through or tongue-buckle straps. Corrosion-resistant hardware made of zinc-plated stamped steel. 1 3/4" Wide polyester web with supple back plaque. Capacity: 310 lbs. Meets or exceeds OSHA 1926 regulation and ANSI Z359.11 standard.

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
AB17530	458075301	Vest style harness w/ pass-through legs	Universal	Ea
AB17550	458036081	Vest style harness w/ tongue-buckle legs	Universal	Ea



AB17550

AB17530



Remove Watermark Now



Nano-Lok™ Arc Flash Self-Retracting Lifeline

Designed specifically for utility applications to provide protection to workers in electrical transmission and distribution environments. Durable, reinforced, 3/4" webbing with Nomex®/Kevlar® fiber withstands sparks, weld splatter and other high heat exposure. Retractable design provides freedom of movement, keeps lifeline out of the worker's way and reduces dragging, snagging and trip falls. Arc flash industry logo easily identifies product for arc flash use. i-Safe™ enabled with RFID technology. Capacity: 420 lbs. Arc flash rated up to 40 cal/cm². Meets or exceeds industry standards: ASTM F887-11; OSHA 1926.502, 1910.66; ANSI Z359.14, A10.32; CSA Z259.2.2.

Features:

- Built-in anchorage connector attaches directly to harness webbing, leaving dorsal D-ring open for other equipment or rescue; design fits snug to worker's back
- Swiveling anchorage loop limits lifeline twisting for smoother operation
- Tough, impact-resistant thermoplastic housing provides maximum durability
- Quick-activating speed sensing brake system stops a fall within inches, providing more protection at low heights; designed for smooth consistent operation
- High-capacity energy absorber and impact indicator protected by Kevlar fiber cover



3101539

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
◆ 3101539	458015391	Twin-leg SRL w/ aluminum rebar hook & twin-leg anchorage	8'	Ea




ExoFit NEX™ Vest Style Harnesses

Full-body harness provides comfort and function with soft, yet extremely durable, anti-absorbent webbing, strategically placed padding and protective elements that prolong service life of harness. Chest platform places labels and i-Safe™ RFID tag behind a Velcro® cover to protect labels and provide easy access. Covered pocket with elastic sides is conveniently placed on front of chest strap to hold workplace or personal items such as a cellular phone. Includes reflective material that increases worker safety in low-visibility environments, stand-up, aluminum dorsal D-ring, integrated suspension trauma straps for post fall-arrest comfort, impact indicator stitches and breakaway lanyard keepers. Capacity: 420 lbs. Meets all applicable OSHA regulations and ANSI Z359.11 standard.

Features:

- Duo-Lok™ quick-connect buckles: lightweight, one-hand use with memory-fit
- Revolver™ vertical torso adjusters: simple, fast adjustment that locks into position
- Hybrid comfort padding: combines premium comfort with durability, protective shoulder caps
- Tech-Lite™ aluminum D-rings: lightweight alloy for added comfort
- Repel™ technology webbing: provides up to 5 times more abrasion resistance and water repellency

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
◆ 1113001	458036381	Vest style harness	S	Ea
1113004	458036391	Vest style harness	M	Ea
1113007	458036401	Vest style harness	L	Ea
1113010	458036411	Vest style harness	XL	Ea

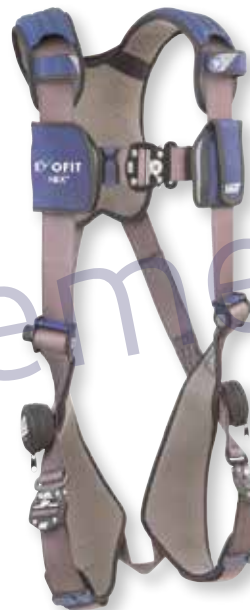

1113007



ExoFit™ XP Construction Style Harness

Designed as a single piece of material constructed in an "X" shape that wraps around for no-tangle donning. Breathable lining wicks away moisture and soft edging prevents chafing. Ergonomic design incorporates removable shoulder, hip and leg padding. Features spring-loaded, stand-up dorsal D-ring, side D-rings, sewn-in back pad and belt, one-handed quick-connect buckle chest and leg straps, and torso buckles to hold straps firmly in place and complete the 5-point adjustment system. i-Safe™ enabled with RFID technology. Hardware is coated for corrosion resistance. Capacity: 420 lbs. Meets or exceeds all applicable OSHA regulations and ANSI Z359.11 standard.



1110152



ExoFit™ XP Vest Style Harnesses

Designed as a single piece of material constructed in an "X" shape that wraps around for no-tangle donning. Breathable lining wicks away moisture and soft edging prevents chafing. Ergonomic design incorporates removable shoulder, hip and leg padding. Features spring-loaded, stand-up dorsal D-ring, built-in belt loops, one-handed quick-connect buckles on chest and legs, and torso buckles to hold straps firmly in place and complete the 5-point adjustment system. i-Safe™ enabled with RFID technology. Hardware is coated for corrosion resistance. Front Capacity: 420 lbs. Meets or exceeds all applicable OSHA regulations and ANSI Z359.11 standard.



1110102

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
1110152	458001521	Construction style harness	L	Ea

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
1110101	458001011	Vest style harness	M	Ea
1110102	458001021	Vest style harness	L	Ea

◆ Non-stock item. Minimum quantity may apply.



Image Courtesy of DBI Sala



DBI SALA ExoFit™ Vest Style Harnesses

Designed as a single piece of material constructed in an "X" shape that wraps around for no-tangle donning. Breathable lining wicks away moisture and soft edging prevents chafing. Ergonomic design incorporates built-in shoulder, hip and leg padding. Includes back D-ring and one-handed quick-connect chest and leg buckles. Hardware is coated for corrosion resistance. i-Safe™ enabled with RFID technology. Capacity: 420 lbs. Meets or exceeds all applicable OSHA regulations and ANSI Z359.11 standard.

1107976

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
1107975	458079751	Vest style harness	S	Ea
1107976	458079761	Vest style harness	M	Ea
1107977	458079771	Vest style harness	L	Ea
1107981	458079811	Vest style harness	XL	Ea



DBI SALA Delta™ Vest Style Harnesses

Patented No-Tangle triangular design allows harness to fall into place for quick and easy donning and holds its basic shape so shoulder straps don't rub against neck. Water-repellent Repel™ webbing has built-in rip-stitch impact indicators for inspection of harness for prior damaging impact loads. Revolver™ vertical torso adjuster makes adjustments simple and fast, eliminating loose ends and locking into place to prevent slippage. Includes tongue-buckle, quick-connect or pass-through leg straps and incorporates a spring-loaded, stand-up dorsal D-ring for fast, easy and safe connections; side D-rings optional. Tech-Lite™ aluminum alloy buckles reduce both carried weight and energy required for all-day job performance. Features lanyard keepers for holding unused snap hooks and reducing trip hazards. i-Safe™ enabled with RFID technology; label protector has Velcro® cover for holding harness labels and i-Safe identification tag. Capacity: 420 lbs. Meets or exceeds all applicable OSHA regulations and ANSI standards, including ANSI Z359.1.

1102000

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
1102000	458020021	Vest style harness w/ tongue-buckle legs	Universal	Ea
1103321	458035041	Vest style harness w/ pass-through legs	Universal	Ea
1110600	458010601	Vest style harness w/ quick-connect legs	Universal	Ea
1102008	458020061	Vest style harness w/ side D-rings & tongue-buckle legs	Universal	Ea



DBI SALA Delta™ Construction Harnesses with Hip Pads

Patented No-Tangle triangular design allows harness to fall into place for quick and easy donning and holds its basic shape so shoulder straps don't rub against neck. Water-repellent Repel™ webbing has built-in rip-stitch impact indicators for inspection of harness for prior damaging impact loads. Revolver™ vertical torso adjuster makes adjustments simple and fast, eliminating loose ends and locking into place to prevent slippage. Tech-Lite™ aluminum alloy buckles reduce both carried weight and energy required for all-day job performance. Lanyard keepers hold unused snap hooks and reduce trip hazards. i-Safe™ enabled with RFID technology; label protector has Velcro® cover for holding harness labels and i-Safe identification tag. Includes tongue-buckle leg straps, a spring-loaded stand-up

1101655

dorsal D-ring for fast, easy and safe connections, and side D-rings for positioning. Hip pad ergonomically supports back and hips while bearing heavy loads. Capacity: 420 lbs. Meets or exceeds all applicable OSHA regulations and ANSI Z359.11 standard.

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
1101654	458035011	Construction vest style harness	M	Ea
1101655	458035021	Construction vest style harness	L	Ea



DBI SALA Delta™ II Derrick Harnesses

Designed for oil industry and workers who operate on monkey board. Features Delta No-Tangle™ design for added comfort and easy donning, seat sling, 18" back D-ring extension, and belt with back support. i-Safe™ enabled with RFID technology. Meets or exceeds all applicable OSHA regulations and ANSI Z359.11 standard.

1106101

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
◆ 1106101	458061011	Derrick harness	M	Ea
◆ 1106102	458061021	Derrick harness	L	Ea
◆ 1106103	458061031	Derrick harness	XL	Ea



Remove Watermark Now



ExoFit NEX™ Construction Style Harnesses

Full-body harness provides comfort and function with soft, yet extremely durable, anti-absorbent webbing, strategically placed padding and protective elements that prolong service life of harness. Chest platform places labels and i-Safe™ RFID tag behind a Velcro® cover to protect labels and provide easy access. Covered pocket with elastic sides is conveniently placed on front of chest strap to hold workplace or personal items such as a cellular phone. Includes reflective material that increases worker safety in low-visibility environments, stand-up dorsal D-ring, side D-rings, integrated suspension trauma straps for post fall-arrest comfort, sewn-in hip pad and removable body belt, impact indicator stitches and breakaway lanyard keepers. Capacity: 420 lbs. Meets all applicable OSHA regulations and ANSI Z359.11 standard.

Features:

- Duo-Lok™ quick-connect buckles: lightweight, one-hand use with memory-fit
- Revolver™ vertical torso adjusters: simple, fast adjustment that locks into position
- Hybrid comfort padding: combines premium comfort with durability
- Tech-Lite™ aluminum D-rings: lightweight alloy for added comfort
- Repel™ technology webbing: provides up to 5 times more abrasion resistance and water repellency



BACK

1113127

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
1113121	458036421	Construction style harness	S	Ea
1113124	458036431	Construction style harness	M	Ea

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
1113127	458036441	Construction style harness	L	Ea
1113130	458036451	Construction style harness	XL	Ea



ExoFit™ XP Arc Flash Harnesses

Designed in the shape of an "X" that wraps around for the ultimate in no-tangle donning and comfort, while soft edging prevents rubbing or chafing. Made of soft, lightweight, yet extremely durable 7,000-lb. nylon. Ergonomic Nomex®/Kevlar® back, shoulder and leg padding provides ultimate comfort and is even removable. Features back and front rescue web loops, pass-through buckles, and PVC-coated hardware. Capacity: 310 lbs. Arc flash-resistant up to 40 cal/cm², ASTM F887-04 compliant. Meets or exceeds all applicable OSHA regulations and ANSI Z359.11 standard.

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
◆ 1110893	458018931	Arc flash harness	S	Ea
◆ 1110890	458008901	Arc flash harness	M	Ea
◆ 1110891	458008911	Arc flash harness	L	Ea
◆ 1110892	458008921	Arc flash harness	XL	Ea



1110890

BACK



PRO™ PACK Shock-Absorbing Lanyard

Pack style, durable, energy-absorbing lanyard with 1 3/4" polyester webbing. Meets or exceeds OSHA 1926 regulation.



1340180

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
1340180	458001801	Twin-leg lanyard w/ snap hook & steel rebar hooks	6'	Ea



PRO™ D-Ring Extension

Dorsal D-ring extender with D-ring at one end, snap hook at other. 18" (45 cm).



1385000

ITEM #	ORDER #	DESCRIPTION	UOM
1385000	458050011	D-ring extension	Ea



EZ-STOP™ Web Lanyards

Lighter, stronger and more durable than previous EZ-STOP models; 66% smaller and 40% lighter with 3/4" webbing that reduces weight. Includes HI-10™ Vectran® energy management material, which is a multifilament, high-tenacity performance yarn spun from liquid crystal polymer that is 5x stronger than steel and provides minimal moisture absorption and resists abrasion, chemicals, cuts and impact. Features redesigned steel snap hooks for lighter weight, hi-viz reflective material, Repel™ webbing, protected labels and an i-Safe™ identification tag. Lightest, strongest, smallest shock absorber in the world with rugged, durable, soft shock absorber cover. Patent-pending, locking gate/nose design for maximum strength and security. Dual action, 3,600-lb. gate for ANSI/CSA compliance and increased strength. 2 1/2" Gate opening fits around most structures. Modular models reduce overall cost of ownership, as components can be replaced individually in the field.



1246011

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
1246011	458060111	Single leg lanyard w/ snap hooks both ends	6'	Ea
◆ 1246022	458060221	Twin-leg lanyard w/ snap hooks at leg ends	6'	Ea

◆ Non-stock item. Minimum quantity may apply.



1241460

EZ-STOP™ Retrax™ Lanyard

Utilizes retraction technology similar to airport security lines, retracting and expanding smoothly and consistently from 2 1/2' to 6'. Retraction keeps lanyard taut and close to body at all times, reducing trip fall hazards and snagging on equipment. Compact and lightweight weighing only 2 lbs. Gate compliancy is 3,600 lb. Limits arresting forces to 900 lbs. or less. RFID technology enabled, 1 3/8" wide web. Meets or exceeds all applicable OSHA regulations and ANSI standards, including ANSI Z359.1.

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
1241460	458014611	Single leg lanyard w/ snap hooks both ends	2 1/2'-6'	Ea



Remove Watermark Now

ShockWave2™ Web Shock-Absorbing Lanyards

Stretchable lanyard incorporates a unique inner core that immediately begins to extend and absorb energy during a fall, limiting arresting forces to an average of 900 lbs. Features abrasion-resistant tubular webbing for durability and 3,600-lb. gated hooks. Expands to 6' and contracts to 4 1/2' in reaction to movements, reducing trip fall hazards and snagging. Impact indicator allows for visual inspection of unit. i-Safe™ RFID technology enabled. Meets or exceeds all applicable OSHA regulations and ANSI standards, including ANSI Z359.1.

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
1244306	458020121	Single leg lanyard w/ self-locking steel snap hooks both ends	6'	Ea
♦ 1244321	458035081	Single leg lanyard w/ self-locking snap hook & 2 1/2" gate flat steel hook	6'	Ea
1244412	458020141	Twin-leg lanyard w/ self-locking snap hook & 2 1/2" gate flat steel hooks at leg ends	6'	Ea



3590500



Rebel™ Self-Retracting Lifelines

Lightweight, compact and durable. Safer than traditional lanyards due to retractable technology to ensure falls are stopped within a few inches. Durable thermoplastic housing on both web and cable models incorporates a swiveling anchorage ring, allowing for ultimate functionality in heavy-use environments. Unique speed-sensing brake keeps forces to a minimum and reduces clearance requirements. Web models feature unique, thin webbing that enables a compact size with a load capacity of 310 lbs. Galvanized steel cable models feature a maximum arresting force of 900 lbs. and support capacity of 420 lbs. and 5 mm cable dia. Hooks have 3,600-lb. gate compliance. Two year warranty, no annual re-certification required. Meets all applicable OSHA, ANSI and CSA standards and requirements, including ANSI Z359.1.

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
3100425	458004251	Web SRL w/ snap hook & housing carabiner	11'	Ea
3100431	458004311	Web SRL w/ snap hook & housing carabiner	20'	Ea
3590019	458090191	Cable SRL w/ snap hook & housing carabiner	15'	Ea
3590500	458005001	Cable SRL w/ swivel snap hook & housing carabiner	33'	Ea
3590550	45800550	Cable SRL w/ swivel snap hook & housing carabiner	50'	Ea



Talon™ Self-Retracting Lifeline

Compact, lightweight design with an all-metal braking system. Anti-ratcheting dual pawl design limits maximum arresting force to 900 lbs. Two styles of anchorage connectors for larger and smaller diameter anchorage points. Features spring-loaded locking pin, impact-resistant nylon housing with 1" nylon webbing and snap hook impact indicator to warn when unit needs to be replaced. Audible indicator ensures unit is functioning properly. No service/recertification required, reducing cost of ownership. i-Safe™ enabled with RFID technology. Meets or exceeds all applicable OSHA regulations and ANSI standards, including ANSI A10.14-1991 and ANSI Z359.1-2007.



3101000

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
3101000	458000011	Single leg SRL w/ snap hook	8'	Ea



Ultra-Lok™ Self-Retracting Lifeline for Retrieval

Rugged, yet extremely lightweight with stainless steel components, anti-ratcheting twin disc brake system and a semi-sealed design. Speed sensing brake system activates to stop a fall and reduce the forces imposed on the user to safe levels. 310-lb. capacity. Meets ANSI Z359.14, ANSI A10.32, OSHA 1910.66 and OSHA 1926.502 requirements.

Features:

- 3-Way emergency retrieval system with built-in winch
- Integrated quick-connect mounting bracket
- Stowable retrieval handle
- 50', 3/16" Galvanized steel cable lifeline
- Rugged, extremely lightweight thermoplastic housing
- Internal energy absorption system
- Constant moving brake system pawls
- Built-in carrying handle
- Swiveling anchorage point
- Swiveling snap hook with impact indicator
- Reserve lifeline system
- Ergonomic cable handle equipped with i-Safe™ technology



3501102



3504430



Ultra-Lok™ Cable Self-Retracting Lifelines

Constructed with a durable, polyurethane thermoplastic housing, stainless steel working components for corrosion resistance and aluminum side plates for maximum durability and minimum weight. Anti-ratcheting twin disc brake system with an audio indicator lets worker know it is functioning properly. Features 3/16" galvanized cable lifeline, reserve lifeline retention system for added safety, 3,600-lb. rated swivel snap hook and swiveling anchorage loop to prevent twisting of lifeline. i-Safe™ enabled with RFID technology. Meets or exceeds all applicable OSHA regulations and ANSI standards, including ANSI Z359.1.

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
3504433	45804433	Cable SRL w/ swivel snap hook	20'	Ea
3504430	458020201	Cable SRL w/ swivel snap hook	30'	Ea
3504450	458044501	Cable SRL w/ swivel snap hook	50'	Ea



Remove Watermark Now



3101277



Nano-Lok™ Self-Retracting Lifelines

Ergonomically designed for ease-of-use and is ideal for direct connection to most harnesses. Lightweight, stays out of the way and can easily be used as a lanyard replacement. Locks quickly, stopping a fall within inches and providing more protection at low heights. Tension is always kept on the lifeline, which


reduces dragging, snagging and trip falls. Features impact-resistant housing, automatic, quick-activating arrestor, impact indicator, 3,600-lb. rated gate openings on carabiners and hooks, and 6' or 9' retractable lifeline. i-Safe™ enabled. Capacity: 420 lbs. Meets or exceeds all applicable OSHA regulations and ANSI standards.

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
3101277	458012771	Twin-leg SRL w/ connector & (2) aluminum rebar hooks	6'	Ea
◆ 3101374	458013741	Twin-leg tie-back SRL w/ fixed connector & 5,000-lb. rated WrapBax hook ends	9'	Ea



Nano-Lok™ Edge Self-Retracting Lifeline

Specifically designed for foot level tie-off, when anchoring at the user's feet is the only option. Ergonomically designed for comfort. Limits average arresting forces to 900 lbs. or less. Requires fall clearances as low as 16'. Integrated, backpack-style energy absorber works with connector to limit forces to protect against sharp edges. Backpack design stays tight to harness and evenly disperses unit's weight. Easy-to-install, direct-to-harness connector provides 360° of rotation, seamless integration of the energy absorber, and leaves the D-ring open for rescue or other equipment. Global sharp edge icon for quick identification of sharp edge product. Tough, flexible, lifeline: 3/16" galvanized cable provides maximum range of motion, durability and cut resistance. Impact-resistant, lightweight thermoplastic housing provides maximum durability. Various hook options and configurations available. Bright orange color for easy identification. Meets applicable standards, including ANSI Z359.14.

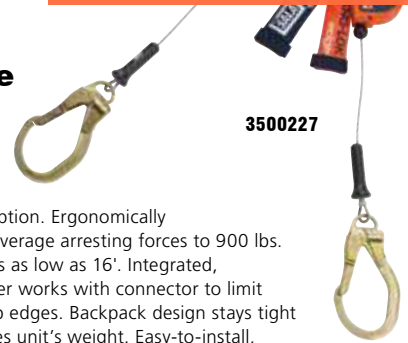

3500227

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
3500227	458012361	Twin-leg SRL w/ steel rebar lock hook, 2 1/2" gate	8'	Ea



3400900



Sealed-Blok™ Self-Retracting Lifeline

Design separates all dynamic components, including the motor spring and brake, from foreign elements such as grease, moisture and dirt. Environmentally sealed stainless steel and cast aluminum housing is designed for durability, even in harsh environments. Anti-ratcheting brake stops falls within inches and limits arresting forces to 900 lbs. Self-locking swivel snap hook with impact indicator. Large pivoting anchorage handle stays in line with load for added security. i-Safe™ Intelligent Safety System enabled. Meets or exceeds all applicable OSHA regulations and ANSI standards, including ANSI Z359.1.

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
◆ 3400900	458020441	SRL w/ galvanized cable & steel snap hook	50'	Ea



Rope Lifeline Assemblies

Constructed of 5/8" polyester/polypropylene blend that offers additional abrasion and UV resistance. Self-locking snap hook has 3,600-lb. gate strength. Meets or exceeds all applicable OSHA regulations and ANSI standards.



1202754

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
1202754	458027541	Rope lifeline w/ snap hook & taped end	30'	Ea
1202794	458035071	Rope lifeline w/ snap hook & taped end	50'	Ea



Tie-Off Adapters

Pass-through design for quick and easy attachment to anchorage. Standard adapter has 1 3/4" polyester strap with 5,000-lb. minimum tensile strength and 3" wide wear pad and coated steel hardware for added abrasion resistance and durability. i-Safe™ enabled with RFID technology. Meets or exceeds all applicable OSHA regulations and ANSI standards, including ANSI Z359.1.



1003000

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
1003000	458030001	Tie-off adapter	3'	Ea
1003006	458035001	Tie-off adapter	6'	Ea



EZ-Line™ Retractable Horizontal Lifeline System

Innovative retractable design allows for quick and efficient set-up and disassembly of any length system. Retractable lifeline is simply pulled out for installation and retracted with built-in winch for dismantle. Entire 60' system is retracted into easy-to-carry case which eliminates large, bulky coils of cable. Weighs 25 lbs. Built-in pre-tension and impact indicators take guess work out of set-up and inspection. Provides hands-free horizontal mobility and continuous protection for (2) users per span, up to (6) users per system. Stanchions not included.



7605060

ITEM #	ORDER #	DESCRIPTION	UOM
7605060	458020231	Retractable horizontal lifeline system	Ea



◆ Non-stock item. Minimum quantity may apply.



Remove Watermark Now



Lad-Saf™ Cable Sleeve for Ladder Safety System

Sleeve with carabiner for Lad-Saf fixed ladder safety system. For use on 3/8" and 5/16" 1x7 or 7x19 solid core cable. Automatically follows user for hands-free climbing and fall protection. Easy to install and detach anywhere along lifeline. Secure locking system stops falls within inches. Built-in gravity lock prevents incorrect installation. Saflok™ steel carabiner for secure connection to harness. Extremely rugged and corrosion-resistant construction; compact, lightweight design with integrated i-Safe™ tag. Order top and bottom brackets, cable and guides separately.

ITEM #	ORDER #	DESCRIPTION	UOM
6160054	458020221	Detachable cable sleeve w/ carabiner	Ea



Rope Grab

Hands-free, 5/8" diameter rope grab designed as a mobile-type, energy-absorbing grab with less sensitivity to rope variations. For use with polypropylene rope. Meets or exceeds all applicable OSHA regulations and ANSI Z359.15 standard.



5000335

ITEM #	ORDER #	DESCRIPTION	UOM
5000335	458020211	Rope grab	Ea



D-Ring with Anchorage Plate

Stainless steel plate with (2) 1/2" attachment holes. Integral D-ring with 5,000-lb. minimum breaking strength. Bolt or weld the unit to a structure. 1/4" x 2" W x 4 1/4" L. Meets or exceeds all applicable OSHA regulations and ANSI standards, including ANSI Z359.1.



2101630

ITEM #	ORDER #	DESCRIPTION	UOM
2101630	458016301	D-ring w/ anchorage plate	Ea
2101636	45801636	D-ring w/ anchorage plate, all stainless steel	Ea



9501403



Suspension Trauma Safety Straps

Allows suspended worker to stand up in harness relieving pressure on arteries and veins around top of legs. Continuous loop design allows both sides of harness to relieve pressure. Strap provides increased comfort and improved circulation to one or both feet at a time while suspended. Safety accessories can be attached to most harness brands/styles right in the field. Installation is fast and efficient - just choke off to strap. Stows easily and stays out of worker's way. To deploy, simply unzip, hook straps together and step into. Sold as set of 2. Harness not included.

ITEM #	ORDER #	DESCRIPTION	UOM
9501403	458020251	Suspension trauma safety straps	Set



D-Ring Extension

Features a snap hook at one end and a D-ring at the other. Makes harness connections quicker, easier and safer. Heavy-duty webbing construction and RFID technology enabled. Meets or exceeds all applicable OSHA requirements and ANSI standards, including ANSI A10.14 (Type II).



1231117

ITEM #	ORDER #	DESCRIPTION	UOM
1231117	458036691	18" D-ring extension	Ea



2000112



Saflok™ Carabiners

Used to securely attach components together. Steel construction with maximum strength of 5,000 lbs. and wide throat openings. Several are designed for easy securing while wearing gloves and all are self-closing/self-locking to keep components firmly attached. Meets or exceeds all applicable OSHA regulations and ANSI standards, including ANSI Z359-2007 for 3,600-lb. gate.

ITEM #	ORDER #	DESCRIPTION	UOM
2000112	458011121	Carabiner, 11/16" opening	Ea
2000114	458020151	Carabiner, 2 3/16" opening	Ea




Remove Watermark Now



Fixed Beam Anchors

Specifically designed for fall arrest anchorage, but can also be used as end point for some horizontal lifeline systems. Installs quickly to beam structure, tightens using built-in adjustment handle. Attaches to beam structure in any orientation or direction for added versatility. Rated 5,000 lbs. minimum strength in any direction. Meets or exceeds all applicable OSHA regulations and ANSI standards, including ANSI Z359.1.

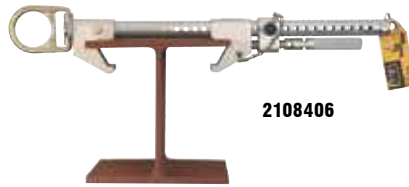


2108406

ITEM #	ORDER #	DESCRIPTION	UOM
2108406	458036011	Fixed beam anchor, fits 2 1/2" to 12" wide flange up to 1 1/2" thick	Ea
2108407	458036921	Fixed beam anchor, fits 2 1/2" to 18" wide flange up to 1 1/2" thick	Ea
2108408	458084081	Fixed beam anchor, fits 2 1/2" to 24" wide flange up to 1 1/2" thick	Ea
2108410	458084101	Fixed beam anchor, fits 12" to 36" wide flange up to 2 1/2" thick	Ea



Glyder™ and Glyder2™ Sliding Beam Anchorage Systems

Provides complete horizontal mobility and can be tied-off overhead or at feet (use with Force2™ shock-absorbing lanyard when used at feet). Anchor effortlessly slides across beam on replaceable wear pads, eliminating metal-to-metal contact. Stainless steel construction for corrosion resistance and strength (5,000-lb. min. tensile strength). Channel lock prevents beam grip ends from rotating for hassle-free connection. Positive spring-loaded engagement provides precision adjustment. Dual-beam grip adjustment prevents twisting and turning as it moves along beam. Glyder model: pins install from top for easier installation; pin retainment system prevents loss or damage to locking pins. Glyder2 model requires no pins and weighs 3.7 lbs. Meets or exceeds all applicable OSHA regulations and ANSI standards, including ANSI Z359.1.

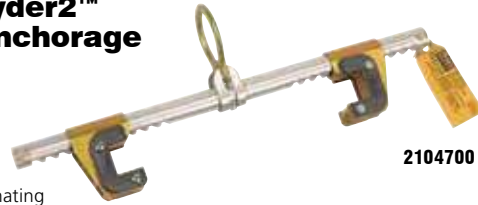

2104700

ITEM #	ORDER #	DESCRIPTION	UOM
2104700	458020161	Glyder2 sliding beam anchorage system, fits 3 1/2" to 14" wide flange up to 1 1/4" thick	Ea
2110941	458036931	Glyder sliding beam anchorage system, fits 6" to 18" wide flange up to 2 1/2" thick	Ea



Image courtesy of DBI-Sala



2199802

Compliance in a Can™

Compliance in a Can: Complete roofing fall protection system with 5-point harness, 5/8" rope grab with 2' shock absorber and 5/8", 50' blend rope lifeline with attached snap hook.

Compliance in a Can Light: Kit includes a 5-point, universal size harness with pass-through legs and a PRO™ single leg, shock-pack lanyard with 3,600-lb. hooks.

ITEM #	ORDER #	DESCRIPTION	UOM
2199803	458098031	Compliance in a Can, original container	Ea
◆ 2199802	458098021	Compliance in a Can Light, original container	Ea



8518000

Advanced™ 5-Piece Hoist System

Designed for manhole and other confined space entry and retrieval applications. Constructed of lightweight materials including high-strength aluminum. Davit pivots for ease of rescue and has an adjustment feature for overhead clearance restrictions. Lower base adjusts to fit most standard entries. System comes equipped with 11 1/2" to 27 1/2" adjustable offset upper mast, 33" lower mast, 3-piece lightweight base and winch mount brackets. Winches and SRLs sold separately. Meets or exceeds all applicable OSHA regulations and ANSI standards.

ITEM #	ORDER #	DESCRIPTION	UOM
◆ 8518000	458068271	Advanced System	Ea



Remove Watermark Now



10077571



Workman® Construction Harness

Vest style harness with back and hip D-rings for work positioning. Features abrasion-resistant, durable yellow polyester webbing for high visibility, lightweight components, integral back pad, removable tongue-buckle tool belt, tongue-buckle leg straps, shoulder pads and web retainer collars. Color-contrasting thigh and torso straps simplify donning. Fits a wide range of body types and sizes. Instructions in English, Spanish and French Canadian. Meets all applicable OSHA, ANSI and CSA standards and requirements, including ANSI Z359.1-2007 and A10.32 and CSA Z259.10-06.

Size	Standard
Back D-Ring	Yes
Hip D-Rings	Yes
Shoulder Pads	Yes

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
10077571	3085305B1	Construction harness	Standard	Ea



Workman® Full-Body Harnesses

Vest style harness with back D-ring and optional hip D-rings for work positioning. Features abrasion-resistant, durable yellow polyester webbing for high visibility, lightweight components, Qwik-Fit™ chest strap and web retainer collars. Choice of Qwik-Fit or tongue-buckle leg straps. Color-contrasting thigh and torso straps simplify donning. Fits a wide range of body types and sizes. Instructions in English, Spanish and French Canadian. Meets all applicable OSHA, ANSI Z359.1-2007 and CSA Z259.10-06 standards.

FEATURES	10072487	10072488	10072479	10072483	10072491
Size	Standard	XL	Standard	Standard	Standard
Back D-Ring	Yes	Yes	Yes	Yes	Yes
Hip D-Rings	No	No	No	Yes	Yes
Chest Straps	Qwik-Fit	Qwik-Fit	Qwik-Fit	Qwik-Fit	Qwik-Fit
Leg Strap Buckles	Tongue	Tongue	Qwik-Fit	Qwik-Fit	Tongue

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
10072487	3085985A1	Full-body harness w/ back D-ring & tongue-buckle legs	Standard	Ea
10072488	3085001C1	Full-body harness w/ back D-ring & tongue-buckle legs	XL	Ea
10072479	3085983A1	Full-body harness w/ back D-ring & Qwik-Fit legs	Standard	Ea
♦ 10072483	3085431B1	Full-body harness w/ back & hip D-rings & Qwik-Fit legs	Standard	Ea
10072491	3085432B1	Full-body harness w/ back & hip D-rings & tongue-buckle legs	Standard	Ea



10077571 BACK

10072479

10072479 BACK



FP Diamond™ Energy-Absorbing Lanyard

Lightweight and features durable polyester sheathing for increased abrasion and UV resistance. Includes a highly visible deployment tag. Pouchless design with added comfort. Contracts to 4 1/2'. Meets all applicable OSHA and CSA standards and requirements, including CSA Z259.11-05 E4.



10023932

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
10023932	308522171	Single leg lanyard w/ HL2000 harness & HL2000 anchor connectors	6'	Ea



FP5K™ Tie-Back Energy-Absorbing Lanyards

Lanyard utilizes a carabiner with a 1" gate opening and 5,000-lb. gate strength in any direction that allows it to be tied back directly to the lanyard. Carabiner body shape helps avoid confusion with standard connectors not designed for tie-back applications. Utilizes Monster-Edge™ webbing with 12,000-lb. minimum breaking strength designed for increased abrasion resistance. Internal wear indicator consists of (2) yellow threads that, when visible, alert a user that the lanyard should be removed from service. Utilizes the Sure-Stop™ energy absorber to keep fall arrest forces below 900 lbs. Meets all applicable OSHA, ANSI and CSA standards and requirements, including ANSI Z359.13 and CSA Z259.11-05 E4.

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
10047084	308535541	Single leg tie-back lanyard, adjustable web w/ 36C snap hook & FP5K snap hook	6'	Ea
♦ 10107208	308572501	Twin-leg tie-back lanyard, adjustable web w/ 36C snap hook & (2) FP5K snap hooks	6'	Ea



10107208



Workman® Energy-Absorbing Lanyard

Lightweight lanyard with a low-profile body. Energy absorber includes a clear, durable protective cover over the labels to increase service life and allow for easy inspection. Tear-tape design keeps fall arrest forces below 900 lbs. Meets all applicable OSHA regulations and ANSI Z359.13.



10113159

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
♦ 10113159	308531591	Twin-leg lanyard w/ 36C snap hooks	6'	EA



Remove Watermark Now



Dyna-Lock® Self-Retracting Lanyard

Three continuously moving independent braking mechanisms prevent freezing in icy or corrosive conditions. Built-in shock absorber limits fall arrest forces to under 900 lbs. and 4 1/2' per second locking speed. Forged steel, zinc-plated, self-locking swivel snap hook on each unit with load indicator that activates and alerts user of impact loading. Lanyard is 3/16" galvanized cable. Capacity/working load is 400 lbs. maximum and 75 lbs. minimum. Meets all applicable OSHA regulations and ANSI standards, including ANSI Z359.14.



506204

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
◆ 506204	308572041	Galvanized cable SRL	50'	Ea



Workman® Self-Retracting Lanyard

Integral ergonomic carrying handle for easier transport and installation. Swivel snap hook with load indicator at lifeline end greatly limits twisting of cable; also alerts users that unit has been involved in a fall and must be removed from service. RFID-enabled to simplify product tracking and inspection. Working capacity: 400 lbs. No required annual factory recertification. Meets all applicable OSHA, ANSI and CSA standards and requirements, including ANSI Z359.14 and CSA Z259.2.2.



10119507

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
◆ 10119507	30900000	Galvanized cable SRL	30'	Ea



Workman® Personal Fall Limiter

Engineered thermoplastic housing decreases weight; rugged, impact-absorbing protective bumpers add durability. High-quality design reduces cost of ownership and eliminates downtime. Integral swivel on PFL connector and a load indicator that alerts unit has been involved in a fall and must be removed from service. Field-replaceable lifeline. No annual factory recertification. Working capacity: 400 lbs. Meets all applicable OSHA regulations, ANSI Z359.14 and CSA Z259.2.2.

10093350

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
10093350	3085626C1	Web PFL w/ 1" steel carabiner & LC snap hook	12'	Ea



Workman® FP Stryder™ Anchorage Connector

Lightweight at 4 1/2 lbs. with 400-lb. load capacity and offers easy, single hand installation. Low-friction wear pads with Teflon® eliminate metal-to-metal contact and allow anchorage connector to glide effortlessly along beam flange. Designed with integral load indicator that alerts user if unit has been exposed to a fall. Versatile design allows for mounting overhead or at worker's feet. Adjustable vernier allows for a secure fit and 1/4" adjustment intervals. Easy-to-use, push button adjustment. Fits beam flange widths from 4" to 14". Field serviceable. Meets all applicable OSHA regulations and ANSI standards, including ANSI Z359.1.



10144431

ITEM #	ORDER #	DESCRIPTION	UOM
◆ 10144431	308544331	Anchorage connector	Ea



Workman® Arc Flash Harnesses

Designed to protect a worker during a fall after an arc-flash exposure at 40 cal/ cm². Durable nylon material will not melt or drip in the event of an arc flash. Features steel back D-ring; Y-shaped D-locator pad that keeps torso straps off of the user's neck to prevent chafing; and Velcro® lanyard keepers for lanyard stowage when not in use. Arc Flash symbol for easy identification. Meets ANSI Z359.1, ASTM F887, OSHA 1910.269 and CSA Z259.10 requirements.



10152652

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
◆ 10152652	308526551	Arc flash harness w/ Qwik-Fit™ leg straps	Standard	Ea
◆ 10152637	308526391	Arc flash harness w/ tongue-buckle leg straps	Standard	Ea



Workman® Mini Personal Fall Limiters

Internal pawl-lock design provides many lower level tie-off points for numerous work applications. Swivel eye connection eliminates line twisting. External energy absorber provides visual load indicator for easy inspection. Twin-leg carabiner connection keeps harness D-ring available for use with other equipment while climbing, or for rescue purposes. Working capacity: 400 lbs. Meets all applicable OSHA regulations and ANSI Z359.14 (Class A).




10157844

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
◆ 10157844	308578441	Single leg PFL w/ AL36C aluminum snap hook	6'	Ea
◆ 10157860	308578601	Twin-leg PFL w/ Pelican hooks	6'	Ea



Remove Watermark Now

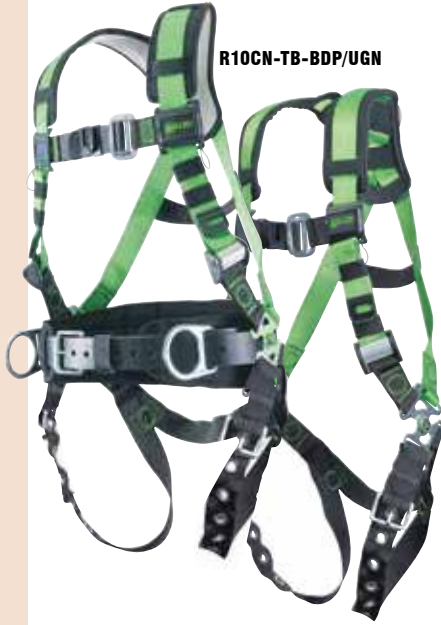

R10CN-TB-BDP/UGN



Miller Revolution™ Construction Harnesses

Features heavy-duty webbing, mating-buckle chest straps, cam buckles, stand-up D-ring, self-contained label pack, web finials and an integrated back and shoulder pad. Rotating PivotLink™ connection provides convenient attachment point for belts, tools and accessories. Rated to 400 lbs. Universal size is L/XL. Meets all applicable OSHA, ANSI and CSA standards and requirements.

FEATURES		
Size	Universal	Universal
Stand-Up Back D-Ring	Yes	Yes
Side D-Rings	No	Yes
Integrated Back/Shoulder Pads	Yes	Yes
Quick-Connect Chest & Leg Buckles	No	No
Cam Shoulder Buckles	Yes	Yes
Tongue Buckle Leg Straps	Yes	Yes
Label Pack	Yes	Yes
Web Finials	Yes	Yes
Removable Belt	No	Yes
Sub-Pelvic Strap	Yes	Yes
PivotLink Hip Connection	Yes	Yes

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
♦ R10CN-TB/UGN	341556881	Construction harness w/ tongue-buckle legs	Universal	Ea
♦ R10CN-TB-BDP/UGN	341557111	Construction harness w/ side D-rings & pad, tongue-buckle legs & removable belt	Universal	Ea

R10CN-TB/UGN

MILLER Miller Revolution™ Harnesses with DualTech™ Webbing

DualTech webbing offers soft, textured inside and durable, chemical-resistant polyester outer material. Features ErgoArmor™ semi-flexible back shield for impact protection, PivotLink™ connection, quick-release cam buckles for one-hand adjustments, self-contained label pack, quick-connect chest buckle, stand-up back D-ring, sub-pelvic strap and web finials. Tested to 7,000-lb. minimum tensile strength for greater safety and longer service life. Rated to 400 lbs. Universal size is L/XL. Meets all applicable OSHA, ANSI and CSA standards and requirements.

FEATURES	RDT-QC/UBK	RDT-TB/UBK
Size	Universal	Universal
Stand-Up Back D-Ring	Yes	Yes
Side D-Rings	No	No
Shoulder Pads	Yes	Yes
Quick-Connect Chest & Leg Buckles	Leg only	Chest only
Cam Shoulder Buckles	Yes	Yes
Tongue Buckle Leg Straps	No	Yes
Label Pack	Yes	Yes
Web Finials	Yes	Yes
Removable Belt	No	No
Sub-Pelvic Strap	Yes	Yes



RDT-TB/UBK

RDT-QC/UBK

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
RDT-QC/UBK	341504611	Harness w/ quick-connect legs	Universal	Ea
♦ RDT-TB/UBK	341504661	Harness w/ tongue-buckle legs	Universal	Ea



650CN-BDP/UGN



Contractor Harnesses

Specifically designed for use in construction. Lightweight, non-stretch webbing with a combination back D-ring pad/shoulder pads to minimize discomfort and stress around neck and shoulders. Soft lumbar back pad adds support and comfort. Features belt loops and removable waist belt, tongue-buckle leg straps, friction-buckle shoulder adjustments, mating-buckle chest straps, self-contained label pack and (2) pull-free lanyard rings. Rated to 400 lbs. capacity. Universal size is L/XL. Meets all applicable OSHA, ANSI and CSA standards and requirements.

FEATURES	650CN-BP/UGN	650CN-BDP/UGN
Size	Universal	Universal
Back D-Ring	Yes	Yes
Front D-Ring	Option	Option
Side D-Rings	No	Yes
Chest Strap Buckle	Mating	Mating
Shoulder Strap Buckles	Friction	Friction
Leg Strap Buckles	Tongue	Tongue
Sub-Pelvic Strap	Yes	Yes

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
♦ 650CN-BP/UGN	341558481	Contractor harness w/ back D-ring	Universal	Ea
650CN-BDP/UGN	341579911	Contractor harness w/ back & side D-rings	Universal	Ea

650CN-BP/UGN



Remove Watermark Now



Lightweight/Comfort Welder Harness

Lightweight harness features blue, flame-retardant Nomex® webbing to protect against weld splatter. Inner Kevlar® core adds strength and high-temperature resistance. Equipped with back D-ring, mating-buckle chest and leg straps, friction shoulder straps, sub-pelvic strap, belt loops and pull-up adjustment. Rated to 400 lbs. capacity. Universal size is L/XL. Meets all applicable OSHA, ANSI and CSA standards and requirements.



650K/UBL

FEATURES	650K/UBL
Size	Universal
Back D-Ring	Yes
Front D-Ring	No
Side D-Rings	No
Shoulder Strap Buckles	Friction
Leg Strap Buckles	Mating
Chest Strap Buckles	Mating
Sub-Pelvic Strap	Yes



E650/UGN



DuraFlex® Stretchable Harness

Comfortable, stretchable webbing with back D-ring, mating-buckle chest and leg straps, sub-pelvic straps, belt loops, friction shoulder straps and back strap to prevent user from falling out of the harness. Pull-free lanyard rings allow for attachment of lanyard when not in use. Green. Universal size is L/XL. Meets all applicable OSHA, ANSI and CSA standards and requirements.



FEATURES	E650/UGN
Size	Universal
Back D-Ring	Yes
Side D-Rings	No
Leg Buckles	Mating
Chest Strap	Mating

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
◆ 650K/UBL	341558471	Welder harness	Universal	Ea



219M-Z7/6FTGN

Manyard® II Stretchable Shock-Absorbing Lanyards

Contracts from 6' to 4', reducing chances of tripping, snagging or dragging. Woven shock-absorbing inner core smoothly expands to reduce fall arrest forces, while outer jacket serves as a back-up web lanyard. Unique warning flag provides visual proof that lanyard has been involved in a fall and must be removed from service. Snap hooks have 3/4" gate opening and rebar hooks have 2 1/2" opening. Includes inspection log label. Green. Connector gates rated at 3,600 lbs. Meets all applicable OSHA, ANSI and CSA standards and requirements.

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
216M-Z7/6FTGN	341558431	Single leg lanyard w/ locking snap hooks both ends	6'	Ea
◆ 219M-Z7/6FTGN	341558421	Single leg lanyard w/ locking snap hook & rebar hook	6'	Ea
◆ 232M-Z7/6FTGN	341558401	Twin-leg lanyard w/ locking snap hooks all ends	6'	Ea



StretchStop® Lanyards with SofStop® Shock Absorber

Contracts from 6' to 4', reducing chances of tripping, snagging or dragging. SofStop shock absorber is designed with a specially-woven inner core that smoothly expands to reduce fall arrest forces. Includes a heavy-duty back-up safety strap. Snap hooks have 3/4" throat opening and rebar hooks have 2 1/2" opening. Green. Connector gates rated at 3,600 lbs. Meets all applicable OSHA, ANSI and CSA standards and requirements.



913SS-Z7/6FTGN

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
913SS-Z7/6FTGN	341564811	Single leg lanyard w/ locking snap hooks both ends	6'	Ea
913RSS-Z7/6FTGN	341560141	Single leg lanyard w/ locking snap hook & locking rebar hook	6'	Ea
8798SS-Z7/6FTGN	341569081	Twin-leg lanyard w/ locking snap hooks all ends	6'	Ea
8798RSS-Z7/6FTGN	341579861	Twin-leg lanyard w/ locking snap hook & locking rebar hooks	6'	Ea

◆ Non-stock item. Minimum quantity may apply.



Remove Watermark Now



913B/6FTGN

BackBiter® Tie-Back Lanyards

All-in-one lanyard designed specifically for tie-back use reduces inventory and increases worker compliance. Features SofStop® shock absorber designed with a specially-woven inner core that smoothly expands to reduce fall arrest forces. Includes locking Miller 5K® snap hook (5,000-lb. gate load capacity from any angle), locking snap hook with 3/4" gate opening harness connection, heavy-duty webbing and cross-arm anchorage connector. Twin-leg models can be used for 100% tie-off requirements. Green. All connectors rated at 3,600-lb. gate strength. Meets all applicable OSHA, ANSI and CSA standards and requirements, including ANSI Z359.1.

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
913B/6FTGN	341543671	Single leg tie-back lanyard	6'	Ea
♦ 8798B/6FTGN	341552001	Twin-leg tie-back lanyard	6'	Ea



Miller Scorpion™ Personal Fall Limiters

Lightweight, compact design offers greater mobility, requires less fall clearance and reduces tripping hazards. Greater versatility through dual operation. Attaches directly to harness D-ring for use as personal fall limiter or as traditional self-retracting lifeline. Includes quick-activating, high strength stainless steel braking system to arrest free falls; visual load indicator to warn when unit must be removed from service; and carabiner. No annual factory recertification required. Capacity: 310 lbs. (400-lb. rated models available). Connector gates rated at 3,600 lbs. Meets all applicable OSHA, ANSI and CSA standards and requirements.



PFL-4-Z7/9FT

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
PFL-4-Z7/9FT	341558361	PFL w/ carabiner, swivel shackle & locking snap hook	9'	Ea



MightyLite™ Self-Retracting Lifelines

Ideally suited to a variety of construction, industrial, warehouse, utility and confined space applications. Compact design with swivels on snap hook and on top of unit perfect for hard-to-mount and permanent mount locations. Constructed with corrosion-resistant aluminum and stainless steel for long life. Automatic inertia brakes engage during a fall. Choose from 1" polyester webbing or galvanized wire rope. No annual factory recertification required. Rated to 400 lbs. when using 928LS/18INYL SofStop® shock absorber. Connector gates rated at 3,600 lbs. Meets all applicable OSHA, ANSI and CSA standards and requirements.

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
♦ RL20P-Z7/20FT	341558371	Web SRL w/ tagline & carabiner	20'	Ea
♦ RL20G-Z7/20FT	341558331	Cable SRL w/ tagline & carabiner	20'	Ea



RL20G-Z7/20FT



RL20P-Z7/20FT



MFL-1-Z7/6FT



TurboLite™ Personal Fall Limiters

Compact and lightweight unit attaches directly to harness back D-ring for greater mobility. Eliminates need for different fall protection equipment to address changes in fall clearance. High-strength, impact-resistant nylon housing is lightweight and designed for maximum durability with 6' of working capacity lifeline. Capacity: 400 lbs. Connector gates rated at 3,600 lbs. No annual factory recertification required. Meets all applicable OSHA, ANSI and CSA standards and requirements.

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
MFL-1-Z7/6FT	341557191	PFL w/ steel twist-lock carabiner & locking snap hook	6'	Ea
♦ MFL-2-Z7/6FT	341564001	PFL w/ steel twist-lock carabiner & locking rebar hook	6'	Ea
♦ MFL-3-Z7/6FT	341564011	PFL w/ locking snap hook, no unit connector	6'	Ea
♦ MFL-4-Z7/6FT	341564021	PFL w/ locking rebar hook, no unit connector	6'	Ea
♦ MFL-9-Z7/6FT	341557791	PFL w/ locking snap hooks both ends	6'	Ea
♦ MFL-10-Z7/6FT	341559021	PFL w/ locking snap hook & locking rebar hook	6'	Ea



Remove Watermark Now



Turbo T-BAK™ Personal Fall Limiters

Tie-back anywhere on lifeline. Cost-effective alternative to tie-back, shock-absorbing lanyards. All-in-one, self-retracting lifeline/anchorage connector designed for anchoring below user's harness back D-ring for greater safety, with integrated shock absorber for tie-back applications with load indicator device. Heavy-duty web lifeline extends/retracts smoothly without interruption. Provides more tie-off anchorage locations with greater variety of beam-size options. Miller 5K® locking snap hook has 5,000-lb. gate capacity from any angle. High-tech strength and abrasion-resistant webbing with white side stripe stitching indicating tie-back use. User-rated for 400-lbs. capacity. Meets all applicable OSHA, ANSI, CSA and CE standards and requirements. ANSI Z359-compliant model has connector gates rated at 3,600 lbs.

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
◆ MFLT-1/7.5FT	341566411	PFL w/out unit connector	7 1/2'	Ea
◆ MFLT-2/7.5FT	341566421	PFL w/ steel twist-lock carabiner	7 1/2'	Ea
◆ MFLT-3/7.5FT	341566441	PFL w/ lightweight aluminum twist-lock carabiner	7 1/2'	Ea
◆ MFLT-4/7.5FT	341566451	PFL w/ locking snap hook w/ 3/4" gate opening	7 1/2'	Ea
◆ MFLT-5/7.5FT	341566461	PFL w/ ANSI Z359-compliant snap hook w/ 3/4" gate opening	7 1/2'	Ea
◆ MFLT-1/7.5FT	341566471	Twin Turbo™ D-ring connector w/ (2) MFLT-1/7.5FT PFL units	7 1/2'	Ea



Falcon™ Self-Retracting Lifelines

High impact-resistant nylon housing with smooth, round edges increases durability. Corrosion-resistant stainless steel and aluminum internal components. Unique side payout design reduces wear on entry guide bushing and cable. Spring tension operation designed not to pull or drag on worker to improve productivity and reduce fatigue. Available in 3/16" galvanized wire rope, stainless steel cable or 0.69" web. Cable models have dual swivels (unit top and snap hook) included to minimize lifeline twisting during use. Improved load indicator on snap hook identifies when unit needs to be removed from service. No annual factory recertification required. Web model rated to 400 lbs. capacity; cable models require SofStop® shock absorber (928LS/18INYL) for 400-lb. rating. Connector gates rated at 3,600 lbs. Meets all applicable OSHA, ANSI and CSA standards and requirements.

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
MP20P-Z7/20FT	341562361	Web SRL w/ stainless steel swivel, carabiner & aluminum snap hook	20'	Ea
MP20G-Z7/20FT	341589711	Cable SRL w/ tagline & carabiner	20'	Ea



Miller MiniLite® Fall Limiter

Self-retracting 11' web lanyard with quick-activating braking system that limits a free fall to inches. Reduces need for extended fall distance clearance, minimizing injuries and making rescue easier. Includes steel twist-lock carabiner, stainless steel swivel shackle and locking snap hook. Capacity: 310 lbs. Connector gates rated at 3,600 lbs. Meets all applicable OSHA, ANSI and CSA standards and requirements.

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
FL11-3-Z7/11FT	341558351	Fall limiter w/ steel twist-lock carabiner & swivel shackle	11'	Ea



Miller Grip™ 3/4" Portable/Reusable Anchorage Connector

Designed as intermediary for securing connecting device to anchorage. Primarily used in concrete applications to attach lifeline or lanyard of single user. Portable, reusable anchorage device easily fastens by pulling spring-loaded trigger and fitting device through hole drilled in properly cured concrete. When anchor is in place, tapered wedges open inside hole and provide secure grip. Can be removed and simply reinstalled in new vertical or horizontal location. 5,000-lb. Ultimate strength, single user connection, 400-lb. capacity.

ITEM #	ORDER #	DESCRIPTION	UOM
◆ 496	341508031	Anchorage connector	Ea



496

◆ Non-stock item. Minimum quantity may apply.



Remove Watermark Now



8816-14



Miller Shadow® Adjustable Aluminum Beam Anchor

Connects horizontally to wide range of I and H beam flanges from 3" to 14" wide and up to 2 1/2" thick. Once attached, unit slides along beam with worker to provide increased safety, mobility and productivity. Integral positive-lock engagement system eliminates need for loose connection pins which can be installed incorrectly or inadvertently disengaged. Meets all applicable OSHA regulations and ANSI standards.

ITEM #	ORDER #	DESCRIPTION	UOM
8816-14	341510151	Shadow beam anchor	Ea



Body Belt

Maintains worker position in operations such as setting forms and tying rebar. Features heavy-duty webbing with built-in 3" back pad, tongue buckle and side D-rings. Universal size is L/XL. For positioning only and not intended for fall protection.



2NA/UBK

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
2NA/UBK	341507101	Body belt w/ side D-rings	Universal	Ea



Harness Belt

Harness accessory for attaching tools. Black web belt is 1 3/4" with tongue buckle. Universal size is L/XL. Not intended for fall protection.



6414N/UBK

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
6414N/UBK	341508261	Harness belt	Universal	Ea



17D-1



Miller Carabiners

Lightweight, automatic twist-lock operation.

ITEM #	ORDER #	DESCRIPTION	UOM
17D-1	34150171	Steel carabiner, 1" gate opening	Ea
18D-1	341506821	Steel carabiner, 2" gate opening	Ea



Titan™ Cross-Arm Strap

Commonly used in conjunction with tie-off point, such as an I-beam, column, rebar, scaffolding, roof truss or other structural member to join connecting device to anchor point. 6' Web strap features a D-ring which slips through a web loop. Meets all applicable OSHA, ANSI and CSA standards and requirements.



T7314/6FTAF

ITEM #	ORDER #	DESCRIPTION	UOM
T7314/6FTAF	341506661	Cross-arm strap	Ea

T6121-27/6FTAF



Titan™ Pack-Type Shock-Absorbing Lanyard

Lightweight, durable polyester webbing with shock-absorber pack. In the event of a fall, pack smoothly expands to reduce fall forces, while backup safety strap deploys for added fall protection. Connector gates rated at 3,600 lbs. Meets all applicable OSHA, ANSI and CSA standards and requirements.

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
T6121-27/6FTAF	341567461	Twin-leg pack-type lanyard w/ snap hooks all ends	6'	Ea



Remove Watermark Now



By Honeywell

Titan™ Non-Stretch Harnesses

Constructed with lightweight, durable, non-stretch polyester webbing, fully adjustable full-body harness has sliding back D-ring, mating-buckle chest and shoulder straps and sub-pelvic strap. Rated at 400 lbs. Universal size is L/XL. Meets all applicable OSHA, ANSI and CSA standards and requirements.

FEATURES	T4000/UAK	T4500/UAK	T4007/UAK	T4507/UAK
Size	Universal	Universal	Universal	Universal
Sliding Back D-Ring	Yes	Yes	Yes	Yes
Side D-Rings	No	No	Yes	Yes
Integrated Back/Shoulder Pads	No	No	No	No
Chest & Shoulder Buckles	Mating	Mating	Mating	Mating
Leg Strap Buckles	Mating	Tongue	Mating	Tongue
Label Pack	Yes	Yes	Yes	Yes
Web Finials	No	No	No	No
Removable Belt	No	No	No	No
Sub-Pelvic Strap	Yes	Yes	Yes	Yes
Lanyard Ring	Yes	Yes	Yes	Yes

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
T4000/UAK	341541571	Harness w/ back D-ring & mating-buckle legs	Universal	Ea
T4500/UAK	341506461	Harness w/ back D-ring & tongue-buckle legs	Universal	Ea
♦ T4007/UAK	341506431	Harness w/ back & side D-rings & mating-buckle legs	Universal	Ea
T4507/UAK	341506471	Harness w/ back & side D-rings & tongue-buckle legs	Universal	Ea



By Honeywell

Titan T-Flex™ Stretchable Harnesses

Durable, stretch webbing and fully adjustable design improves comfort and mobility. Features back strap to prevent roll out, sliding back D-ring and pad for positioning, non-slip, mating-buckle chest strap, sub-pelvic strap and pull-free lanyard ring.



TF4500/UAK

Contrasting color leg straps simplify donning. Universal size is L/XL. Meets all applicable OSHA, ANSI and CSA standards and requirements.

FEATURES	TF4000/UAK	TF4500/UAK	TF4007/UAK	TF4507/UAK
Size	Universal	Universal	Universal	Universal
Sliding Back D-Ring & Pad	Yes	Yes	Yes	Yes
Side D-Rings	No	No	Yes	Yes
Integrated Back/Shoulder Pads	No	No	No	No
Chest Strap	Mating	Mating	Mating	Mating
Shoulder Buckles	No	No	No	No
Leg Strap Buckles	Mating	Tongue	Mating	Tongue
Label Pack	Yes	Yes	Yes	Yes
Web Finials	No	No	No	No
Removable Belt	No	No	No	No
Sub-Pelvic Strap	Yes	Yes	Yes	Yes
Lanyard Ring	Yes	Yes	Yes	Yes

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
♦ TF4000/UAK	341505621	Stretchable harness w/ back D-ring & mating-buckle legs	Universal	Ea
♦ TF4500/UAK	341505641	Stretchable harness w/ back D-ring & tongue-buckle legs	Universal	Ea
♦ TF4007/UAK	341505631	Stretchable harness w/ back & side D-rings & mating-buckle legs	Universal	Ea
TF4507/UAK	341505651	Stretchable harness w/ back & side D-rings & tongue-buckle legs	Universal	Ea



By Honeywell

Titan™ Harness/ Shock-Absorbing Lanyard Combo

Features sliding back D-ring with attached lanyard which keeps worker in an upright position in the event of a fall. Lightweight, durable webbing provides all day comfort and sub-pelvic strap helps reduce pressure on shoulders and legs. Equipped with mating-buckle leg straps. Permanently attached, 6' shock-absorbing tubular lanyard with snap hook features a built-in woven inner core that smoothly expands to reduce fall arrest forces. Capacity: 400 lbs. Lanyard connector gates rated at 3,600 lbs. Universal size is L/XL. Meets all applicable OSHA, ANSI and CSA standards and requirements, including ANSI A10.32.



TK4051-27/U/6FTAK

FEATURES	TRK4051/U/6FTAK
Size	Universal
Side D-Rings	No
Front D-Rings	No
Shoulder Strap	Mating
Leg Strap	Mating
Chest Strap	Mating

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
TK4051-27/U/6FTAK	341566651	Harness/lanyard combo	Universal	Ea

♦ Non-stock item. Minimum quantity may apply.



Remove Watermark Now



MILLER
By Honeywell

Titan™ Tubular Shock-Absorbing Lanyard

Lightweight, durable 6' webbing with built-in, woven inner core that smoothly

T5111-Z7/6FTAF

expands to reduce fall arrest forces, while outer jacket serves as a backup web lanyard. Connector gates rated at 3,600 lbs. Meets all applicable OSHA, ANSI and CSA standards and requirements.

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
T5111-Z7/6FTAF	341566801	Single leg tubular lanyard w/ snap hooks both ends	6'	Ea



MILLER
By Honeywell

219WRS-Z7/6FTYL

Manyard® Shock-Absorbing Lanyards

Specially woven shock-absorbing inner core smoothly expands to reduce fall arrest forces, while outer jacket serves as a back-up web lanyard. Unique warning flag provides visual proof that lanyard has been involved in a fall and must be removed from service. Yellow. Connector gates rated at 3,600 lbs. Meets all applicable OSHA, ANSI and CSA standards and requirements.

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
219WRS-Z7/6FTYL	341566721	Single leg lanyard w/ snap hook & rebar hook	6'	Ea



MILLER
By Honeywell

TRK4500-Z7/50FTAKU

Titan™ Roofing Fall Protection Kit

Ideal for commercial or residential roofing applications. Contains lightweight, full-body harness, 3' pack-type shock-absorbing lanyard with snap hooks at each end, reusable roof anchor with attachment D-ring, 5/8" trailing rope grab and 50' rope lifeline. Fully adjustable harness has sliding back D-ring, sub-pelvic support strap, mating-buckle chest and shoulder straps, and tongue-buckle leg straps. Rated at 400 lbs. Trilingual labeling and instructions. Universal size is L/XL. Meets all applicable OSHA, ANSI and CSA standards and requirements, including ANSI A10.32.

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
TRK4500-Z7/50FTAKU	341567341	Roofing kit	Universal	Ea



TCK4500-Z7/U/6FTAK

MILLER
By Honeywell

Titan™ Construction Fall Protection Kit

All-in-one kit designed specifically for construction industry. Includes 6' tubular shock-absorbing lanyard; 6' cross-arm strap anchorage connector; and full-body harness with tongue-buckle leg straps, sliding back D-ring and sub-pelvic support strap, rated at 400 lbs. Lanyard connector gates rated at 3,600 lbs. Universal size is L/XL. Meets all applicable OSHA, ANSI and CSA standards and requirements.

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
TCK4500-Z7/U/6FTAK	341566971	Construction fall protection kit	Universal	Ea



9077/1

MILLER
By Honeywell

Bandit™ Tool Lanyard

Designed for attachment to waist belt while still allowing enough freedom of movement to perform task at hand. Tools connect using carabiner or by looping cord around tool and cinching tight. Includes loop for waist belt attachment and lightweight aluminum mini-carabiner and cord adjuster.


ITEM #	ORDER #	DESCRIPTION	UOM
9077/1	341510611	Tool lanyard	Ea



Permanent Roof Anchors for Wood Ridge Peak

Designed to provide permanent anchorage points when securely installed on wood ridge peak. Constructed of stainless steel and intended to provide fall protection for single worker. Supplied with (8) 16d nails. Single or double D-ring configurations. Meets all applicable OSHA, ANSI and CSA standards and requirements.

ITEM #	ORDER #	DESCRIPTION	UOM
◆ RA40	341504461	Double D™ permanent roof anchor	Ea
◆ RA41	341504471	Single D™ permanent roof anchor	Ea

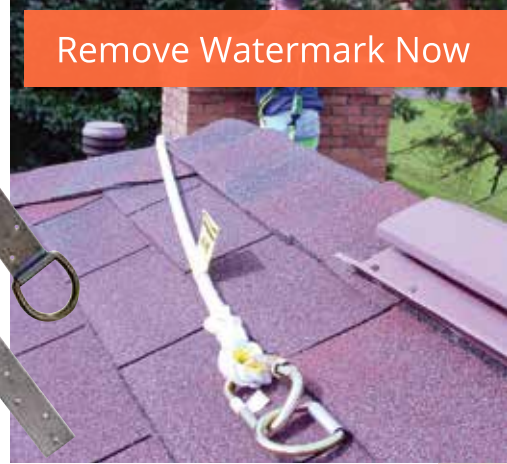

Remove Watermark Now



Titan B-Compliant™ Roof Kit

Economical, easy-to-use, complete fall protection solution simplifies product selection by providing all necessary components for fall protection safety and to meet federal OSHA compliance.

Includes:

- Lightweight, full-body harness with 3-point adjustment and mating-buckle leg and chest straps for easy adjustment and comfortable fit. Allows for quick donning and greater mobility, increasing productivity with less worker fatigue. Universal size is L/XL.
- Rope grab with permanently-attached, 3' lanyard with shock absorber pack. In the event of a fall, rope grab locks on to rope reducing force on worker.
- 25' High-strength, 5/8" dia. polyester/polypropylene rope lifeline with locking snap hook enables quick attachment to roof anchor and is UV- and moisture-resistant for increased durability.
- Reusable stainless steel roof anchor bracket with plated D-ring is corrosion-resistant.
- Waterproof container protects equipment when stored.



TRK2000-Z7/25FT

ITEM #	ORDER #	DESCRIPTION	UOM
◆ TRK2000-Z7/25FT	341567291	Roof kit	Ea



Xenon® Permanent Horizontal Lifeline Kit

Automatic pass-through fall protection for multiple workers. Do-it-yourself installation with patented stainless steel components that are easy-to-use and require minimal maintenance. For use along crane rail runways, loading bays/docks, machinery, conveyors, rooftops, inside sports arenas, pipe racks, bridges and many industrial applications. Stainless steel system kits designed for up to 2 workers (up to 4 workers with a second Xenon shock absorber). Kit includes stainless steel 5/16" wire rope, Xenon 4-in-1 shock absorber, intermediate bracket, (2) stainless steel D-bolt anchorage connectors (rated up to 10,000 lbs.), swageless fast-attach fitting, anchor shackle, thimble, cable clips, hardware and instruction manual. Xenon shuttle sold separately. Meets all applicable global standards for Safety at Height.

- Xenon shuttle self-aligns for smooth pass-through of intermediate brackets. Double-locking mechanism ensures security; allows for easy, one-hand operation. No moving pass-through parts. Ideal for dusty, gritty or salty environments.

ITEM #	ORDER #	DESCRIPTION	SIZES	UOM
◆ X00060	341559851	Permanent HLL kit w/ (1) intermediate bracket	60'	Ea
◆ 1005709	341559861	Shuttle		Ea



Vi-Go™ Automatic Pass-Through Cable Sleeve

Cable sleeve, sold separately from the Vi-Go Ladder Climbing Safety Systems, is designed to follow user along a 3/8" or 5/16" cable lifeline while ascending or descending, instantly locking in the event of a fall. Integrated shock-absorbing element provides dual shock-absorbing system to further reduce fall forces and protects system and ladder from damage. Once a fall occurs, the deployed shock absorber indicates unit must be removed from service. Can be used with automatic or manual system. Includes integral swivel and carabiner.



ITEM #	ORDER #	DESCRIPTION	UOM
◆ VGCS-SC	341561411	Automatic pass-through cable sleeve	Ea

◆ Non-stock item. Minimum quantity may apply.